



Verona



SANREMO
COFFEEMACHINES
made in italy



SED VERSION

It guarantees an electronic dosing system through the button panel



SAP VERSION

It allows the semi-automatic programming of doses

124 C° 10:00
SANREMO

TIME AND TEMPERATURE DISPLAY

Available only for: mod. SED



POWER DRY STEAM

Silky milk at high capacity

GROUP SR 61

Sanremo exclusive design that allows an accurate maintenance of the set temperature



Characteristics



GLASS LEVEL
It allows to monitor the water level in the boiler.



MANUAL BOILER LOAD
It allows to bypass the electronic-level control.




ACTIVATED ELECTRONIC PRE-INFUSION
Management of the delayed activation. E.V. water in the first phase of distribution.



ELECTRONIC AUTO-LEVEL
Through a electronic level probe the boiler is automatically filled and maintained to the right filling level.



MULTIFUNCTION DISPLAY
It allows to monitor the right functioning of the machine and to program the main functions.



STATIC RELAY BOILER TEMPERATURE
It allows to regulate with the temperature as accurately as possible.



DOUBLE READING GAUGE
It allows to control at the same time the boiler pressure and the distribution pressure.



Verona
Link to the website



GROUP SR 61
Exclusive Sanremo design that allows a precise maintenance of the set temperature.



EASY SERVICE
Easy access to the internal parts for a quick and easy technical assistance.



AUTOMATIC CLEANING CYCLE
Process to clean the coffee groups.


SANREMO

COFFEE MACHINES

Colors

	Red	RAL 3002		Silver	RAL 9006
	Matte black	RAL 9005		Pearl white	RAL 1013
	Black	RAL 9005		White	RAL 9003


Models



32.28 inches / 820 mm

2 group SED-SAP


2 steam taps
1 water tap
1 one-cup portafilters
2 two-cup portafilters



41.34 inches / 1050 mm

3 group SED-SAP

2 steam taps
1 water tap
1 one-cup portafilters
3 two-cup portafilters

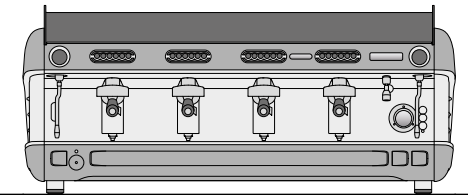

51.97 inches / 1320 mm


4 group SED-SAP

2 steam taps
1 water tap
1 one-cup portafilters
4 two-cup portafilters


23.23 inches
590 mm



TALL VERSION



25.67 inches
652 mm



24.02 inches / 610 mm



Optional



AUTOSTEAM
Steam pipe characterized by an electronic system that allows to mount and or heat milk at the set temperature.



COMPETITION FILTERS
Shape and volume designed to better capture coffee aromas and fragrances. Sanremo exclusive design.



EXTERNAL VOLUMETRIC PUMP



MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS
Immediate mixing of cold/hot water for a better chemical and organoleptic quality.

Technical data


		2 group SED-SAP	3 group SED-SAP	4 group SED-SAP
voltage	V	220-240 1N / 280-415 3N		
power input	kW	3.15 - 3.35	5.8 - 6.05	5.8 - 6.05
steam boiler capacity	US gal / lt	3.17 / 12	5.02 / 19	5.97 / 22.6
steam boiler power	kW	2.95	5.6	5.6
pump power	kW	0.15	0.15	0.15
net weight	lb / kg	150 / 68	187 / 85	240 / 109



HEATER
Dedicated resistor to keep all the cups at the optimal temperature.



NAKED PORTAFILTERS



BLUETOOTH COMMUNICATION SYSTEM

*For more information about our
coffee machines please contact us
at export@sanremomachines.com*



SANREMO
COFFEE MACHINES

SANREMO coffee machines s.r.l.
Via Giacomo Bortolan 52
31050 Vascon di Carbonera [TV] – ITALY
T +39 0422 448900
F +39 0422 448935
www.sanremomachines.com